

Table 3

Cat. No.	Models		Cross-reference		Sizes	Rated voltage (V)	Rated current (A)	Dimensions/size (mm)				Weight (g)									
	MIRO		gG(Normal)	aR(Fast)				Fig.	ϕ A	ϕ C	ϕ D		L								
0301	RO21	RS21	5SB	E27 5SD	D II	500	2-6	3.1	6	22	13	50	24.8								
							8-10	3.1	8	22	13	50									
							13	3.1	8	22	15	50									
							16	3.1	10	22	15	50									
							20	3.1	12	22	15	50									
0302	RO22	RS22	5SB	E33 5SD	D III	500	30-40	3.1	16	27	20	50	48.1								
							50	3.1	18	27	20	50									
							63	3.1	20	27	20	50									
							63	3.1	20	27	20	50									
							63	3.1	20	27	20	50									
0303	RO23	RS23	-	-	D III	750	2-6	3.1	6	27	20	70	64								
							8-10	3.1	8	27	20	70									
							16	3.1	10	27	20	70									
							20	3.1	12	27	20	70									
							25	3.1	14	27	20	70									
							35	3.1	16	27	20	70									
							50	3.1	18	27	20	70									
							63	3.1	20	27	20	70									
							0304	RO24	RS24	E16	5SA	-		500	2-6	3.1	6	12.5	11.3	50	11.7
															10	3.1	8	12.5	11.3	50	
16	3.1	10	12.5	11.3	50																
20-25	3.1	12	12.5	11.3	50																
0305	RO27	RS27	BLA	BLC	-	600	3-10	3.1	8	12.5	11.5	50	13.1								
0306	RO28	RS28	BLA	BLC	-	600	15-20	3.1	10	12.5	11.5	50	14.5								
0307	RO29	RS29	BLA	BLC	-	600	25-40	3.1	14	12.5	11.5	50	16.4								

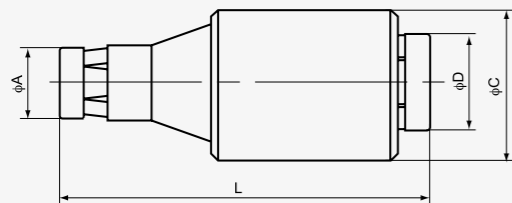


Figure 3.1

Table 3 (cont.)

Cat. No.	Models		Cross-reference		Sizes	Rated voltage (V)	Rated current (A)	Dimensions/size (mm)				Weight (g)			
	MIRO		gG(Normal)	aR(Fast)				Fig.	ϕ A	ϕ B	ϕ C		ϕ D	L	
0308	RO26	RS26	E14	-	D01	380	2-6	3.2	5	7.3	10.6	10	36	12.7	
							10	3.2	5	8.5	10.6	10	36		
							16	3.2	5	9.7	10.6	10	36		
							D02	20	3.2	8.5	11	15	14		36
								25	3.2	8.5	12	15	14		36
								35	3.2	8.5	13.3	15	14		36
								50	3.2	8.5	14.5	15	14		36
							D03	63	3.2	8.5	16	15	14		36
								80	3.2	17	22	22	21		43
								100	3.2	17	25	22	21		43

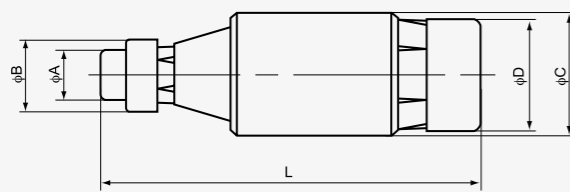


Figure 3.2



Table 3 (cont.)

Cat. No.	Models		Cross-reference		Sizes	Rated voltage (V)	Rated current (A)	Dimensions/size (mm)				Weight (g)	
	MIRO		gG(Normal)	aR(Fast)				Fig.	ϕ A	ϕ B	ϕ C		L
0309	RL1-15	RLS1-15	-	-	-	380	2-15	3.3	13	16.5	13	32	13
0310	RL1-60	RLS1-60	-	-	-	380	20-60	3.3	19	26.5	19	49	50.7

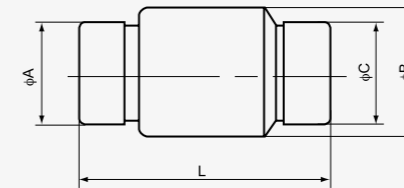


Figure 3.3

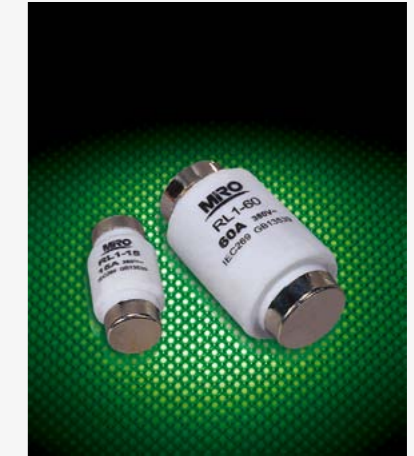


Table 3 (cont.)

Cat. No.	Models		Cross-reference		Sizes	Rated voltage (V)	Rated current (A)	Dimensions/size (mm)				Weight (g)		
	MIRO		gG(Normal)	aR(Fast)				Fig.	ϕ A	ϕ B	ϕ C		ϕ D	
0311	RL1-100	RLS1-100	-	-	-	380	50-100	3.4	6.5	27.5	32.5	27.5	92.8	
0312	RO201	RS201	5SB	BLA	-	600	80	D IV	3.4	5	-	33.5	28.5	112.2
								D V	3.4	7	-	33.5	28.5	115
0313	RO202	RS202	5SB	BLA	-	600	150-350	3.4	8	-	45	38	200.5	
0314	RO203	RS203	5SB	BLA	-	600	400-630	3.4	10	-	60	50	320	

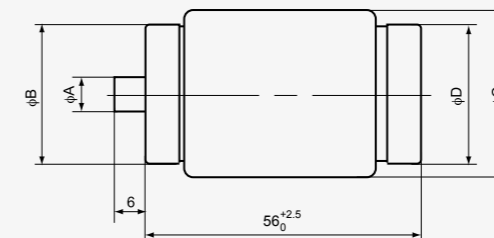


Figure 3.4



Table 3 (cont.)

Cat. No.	Models		Cross-reference		Sizes	Rated voltage (V)	Rated current (A)	Dimensions/size (mm)		Weight (g)
	MIRO		gG(Normal)	aR(Fast)				Fig.	L	
0315	RL1-200	RLS1-200	-	-	-	380	160-200	See Figure 3.5	204	

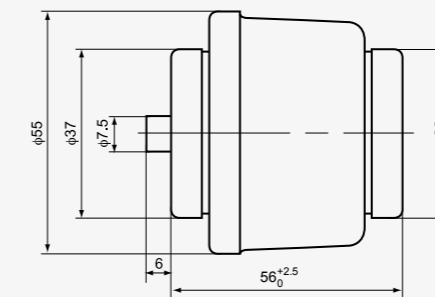


Figure 3.5

