



<b>URDC</b>  <b>E180276</b> <b>NH000</b>	<b>Rated Voltage</b> [Un] 700V <sub>DC</sub>	<b>Rated Breaking Test Capacity</b> 30kA Fuse Links for Low Inductance Applications	<b>Class</b> aR	<b>Standard(s)</b> UL 248-13 VDE 0636 Part 40
---	--	---	--------------------	---

Rated Current I <sub>n</sub> [A]	Without Indicator DIN 80 Article Number	With Top Indicator DIN 80 Article Number	With Top Indicator 70mm Article Number	Power Loss [W]	Pre-arcing I <sup>2</sup> t [A <sup>2</sup> s]	Total I <sup>2</sup> t* @ 700V <sub>DC</sub> [A <sup>2</sup> s]
35	2029221.35	✓ 2029220.35	✓ 2025920.35	14	26	135
50	2029221.50	✓ 2029220.50	✓ 2025920.50	17	104	530
63	2029221.63	✓ 2029220.63	✓ 2025920.63	20	140	690
80	2029221.80	✓ 2029220.80	✓ 2025920.80	23	330	1 650
100	2029221.100	✓ 2029220.100	✓ 2025920.100	26	930	4 300
125	2029221.125	✓ 2029220.125	✓ 2025920.125	30	1 400	6 400
160	2029221.160	✓ 2029220.160	✓ 2025920.160	35	1 950	8 000
200	2029221.200	✓ 2029220.200	✓ 2025920.200	40	3 740	16 000
250	2029221.250	✓ 2029220.250	✓ 2025920.250	45	5 580	22 900
315	2029221.315	✓ 2029220.315	✓ 2025920.315	51	12 300	46 000

Weight [kg/1]	0.17	* (L/R=1ms)
Units per Package	3	

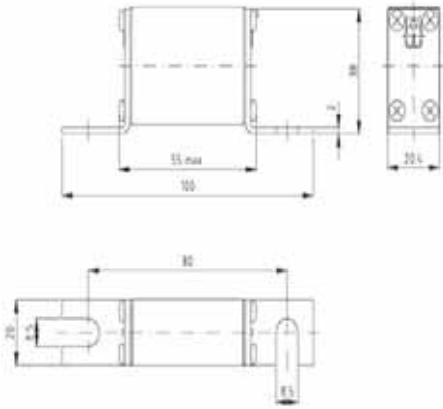

2029221 / 2029220

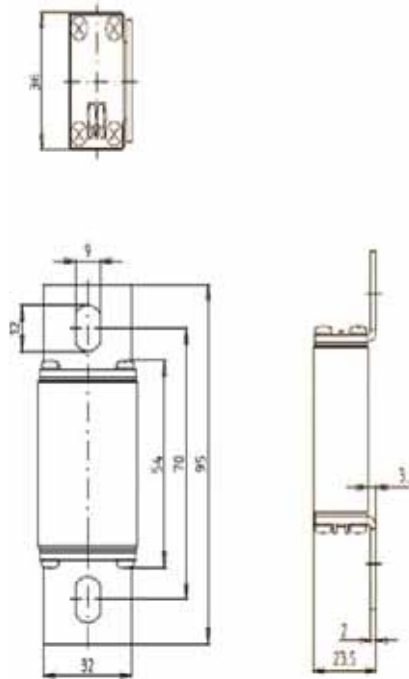

2025920

**Accessories**

Fuse Bases	Page	 <b>E186970</b>
2118901	284	
2118908		
21189 11		