


Very HRC Fuses 5x25/6x32 Fuses with striker 250V - F&M 5x25

Ferraz-Shawmut speciality

Approvals UL recognized E 76491

250V F
250V M

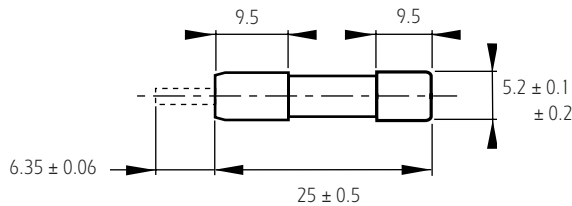

250VAC F 5x25 with trip-indicator Fast-acting Very High breaking capacity

Approvals	Voltage rating Un (VAC)	Rating (A)	Reference Number	Weight (g)	Pack.	Catalog Number
	250	1	D077812	2,5	20	MI5F25V1P
	250	1,6	T078999	2,5	20	MI5F25V1,6P
	250	2	V079000	2,5	20	MI5F25V2P
	250	2,5	W079001	2,5	20	MI5F25V2,5P

Approvals	Voltage rating Un (VAC)	Rating (A)	Reference Number	Weight (g)	Pack.	Catalog Number
	250	4	X079002	2,5	20	MI5F25V4P
	250	5	B076844	2,5	20	MI5F25V5P
	250	6,3	Y079003	2,5	20	MI5F25V6,3P
	250	10	E077813	2,5	20	MI5F25V10P

250VAC M 5x25 with trip-indicator Medium Time lag Very High breaking capacity

Approvals	Voltage rating Un (VAC)	Rating (A)	Reference Number	Weight (g)	Pack.	Catalog Number
	250	1	L079015	2,5	20	MI5M25V1P
	250	1,25	M079016	2,5	20	MI5M25V1,25P
	250	1,6	N079017	2,5	20	MI5M25V1,6P
	250	2	P079018	2,5	20	MI5M25V2P
	250	2,5	Q079019	2,5	20	MI5M25V2,5P

Approvals	Voltage rating Un (VAC)	Rating (A)	Reference Number	Weight (g)	Pack.	Catalog Number
	250	3,15	R079020	2,5	20	MI5M25V3,15P
	250	4	S079021	2,5	20	MI5M25V4 P
	250	6,3	T079022	2,5	20	MI5M25V6,3P
	250	10	Q075684	2,5	20	MI5M25V10P