


Miniature Fuses

Convenience Fuses 5x20
5F Fast Acting
250VAC from 0.032 to 20A



Dimensions

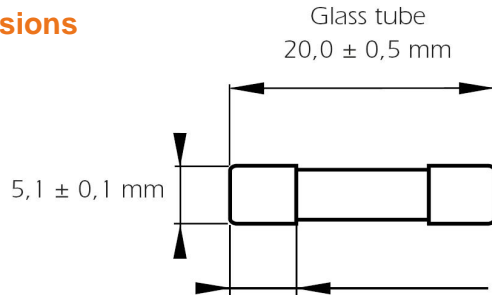

Product weight: 1.2g max.
Packaging: 10 boxes x 10 fuses.

Size	Catalog Number	Reference Number	Rated Voltage (V)	Nominal Current (A)	Breaking capacity @ Nominal current (A)
5x20	MI5F25V0.032	D222942	250	0.032	35
5x20	MI5F25V0.04	M200732	250	0.04	35
5x20	MI5F25V0.05	B201274	250	0.05	35
5x20	MI5F25V0.063	L201789	250	0.063	35
5x20	MI5F25V0.08	K211011	250	0.08	35
5x20	MI5F25V0.1	L200731	250	0.1	35
5x20	MI5F25V0.125	A201273	250	0.125	35
5x20	MI5F25V0.16	K201788	250	0.16	35
5x20	MI5F25V0.2	J211010	250	0.2	35
5x20	MI5F25V0.25	A211531	250	0.25	35
5x20	MI5F25V0.315	F212042	250	0.315	35
5x20	MI5F25V0.4	B211532	250	0.4	10 x In
5x20	MI5F25V0.5	Y212564	250	0.5	10 x In
5x20	MI5F25V0.63	J213080	250	0.63	10 x In
5x20	MI5F25V0.8	G212043	250	0.8	10 x In
5x20	MI5F25V1	D213581	250	1	10 x In
5x20	MI5F25V1.25	D214087	250	1.25	10 x In
5x20	MI5F25V1.6	Z212565	250	1.6	10 x In
5x20	MI5F25V2	J214598	250	2	10 x In
5x20	MI5F25V2.5	Q215110	250	2.5	10 x In
5x20	MI5F25V3.15	R215617	250	3.15	10 x In
5x20	MI5F25V4	Z216130	250	4	10 x In
5x20	MI5F25V5	W216633	250	5	10 x In
5x20	MI5F25V6.3	H217150	250	6.3	10 x In
5x20	MI5F25V8	M217660	250	8	10 x In
5x20	MI5F25V10	X218175	250	10	10 x In
5x20	MI5F25V12.5	K218693	250	12.5	10 x In
5x20	MI5F25V16	Y219211	250	16	10 x In
5x20	MI5F25V20	A219742	250	20	10 x In

Fuses without approval.

Miniature Fuses

Convenience Fuses 5x20
5F Fast Acting
250VAC from 0.032 to 20A



Melting Time Limits

Nominal current	210% x I _n	275% x I _n	400% x I _n	1000% x I _n
From 0.032mA to 100mA	30min maxi	10ms mini 500ms maxi	3ms mini 100ms maxi	20ms maxi
From 125mA to 20A	30min maxi	50ms mini 2s maxi	10ms mini 300ms maxi	20ms maxi

Time Current Curve

