

Miniature Fuses


UL Fuses 5x20
5MF Fast Blow
250VAC/125VAC from 0.08 to 8A



Complying with UL / CSA 248-14



Dimensions

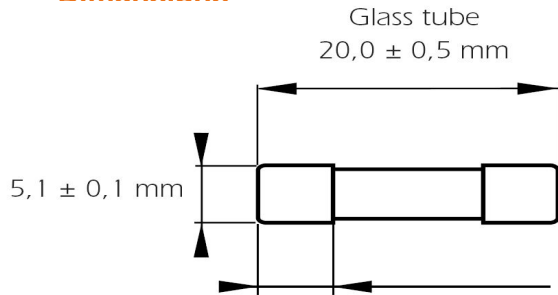

Product weight: 1.2g max.

Packaging: in box of 1000 pieces
or in blister of 50 pieces

Size	Catalog Number	Reference Number	Rated Voltage (V)	Nominal Current (A)	Breaking capacity under 250V (A)	Breaking capacity under 125V (A)	Watts Loss @ 100% In (W)	Max. voltage drop (V)
5x20	MI5MF25V0.08	Q208601	250	0.08	200	10000	0.32	3.05
5x20	MI5MF25V0.1	F207511	250	0.1	200	10000	0.35	2.65
5x20	MI5MF25V0.125	G207512	250	0.125	200	10000	0.6	3.64
5x20	MI5MF25V0.2	H207513	250	0.2	200	10000	0.72	2.76
5x20	MI5MF25V0.25	J207514	250	0.25	200	10000	0.79	2.4
5x20	MI5MF25V0.3	K207515	250	0.3	200	10000	0.84	2.09
5x20	MI5MF25V0.4	L207516	250	0.4	200	10000	-	-
5x20	MI5MF25V0.5	V206236	250	0.5	200	10000	1.04	1.58
5x20	MI5MF25V0.6	W206237	250	0.6	200	10000	-	-
5x20	MI5MF25V0.7	M207517	250	0.7	200	10000	0.2	0.22
5x20	MI5MF25V0.75	X206238	250	0.75	200	10000	-	-
5x20	MI5MF25V0.8	N207518	250	0.8	200	10000	-	-
5x20	MI5MF25V1	Y206239	250	1	200	10000	0.26	0.2
5x20	MI5MF25V1.25	Z206240	250	1.25	200	10000	0.31	0.19
5x20	MI5MF25V1.5	A206241	250	1.5	200	10000	0.36	0.18
5x20	MI5MF25V1.6	P207519	250	1.6	200	10000	-	0.18
5x20	MI5MF25V2	B206242	250	2	200	10000	0.44	0.17
5x20	MI5MF25V2.5	C206243	250	2.5	200	10000	0.52	0.16
5x20	MI5MF25V3	D206244	250	3	200	10000	0.59	0.15
5x20	MI5MF12.5V4	E206245	125	4	-	10000	0.73	0.14
5x20	MI5MF12.5V5	F206246	125	5	-	10000	0.86	0.13
5x20	MI5MF12.5V6	G206247	125	6	-	10000	0.98	0.12
5x20	MI5MF12.5V7	H206248	125	7	-	10000	1.1	0.12
5x20	MI5MF12.5V8	J206249	125	8	-	10000	1.22	0.12

Miniature Fuses

UL Fuses 5x20
5MF Fast Blow
250VAC/125VAC from 0.08 to 8A



Melting Time Limits

Nominal current	100% x I _n	135% x I _n	200% x I _n
From 0.8A to 8A	4h mini	1h maxi	5s maxi

Time Current Curve

