


Very HRC Fuses 6x32 125V to 250V - FA Very Fast Acting

Approvals UL recognized E 76491

FROM 0,1 TO 30A

Dimensions

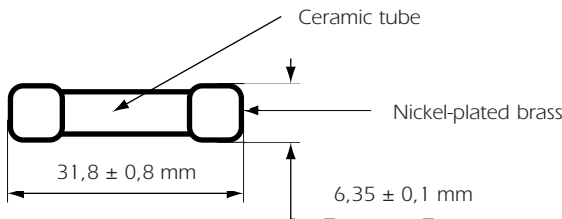

Fuses with filler
Max weight : 2,5 g

Basic Characteristics

Size	Rated Voltage	Rated Current	Breaking Capacity	[I ² t] Pre-arcing	[I ² t] Total clearing at Un	Max voltage drop at In	Designation	Reference Number	Catalog Number
mm	VAC	A		A ² s		V			
6,3 x 32	250	0,100	200 kA 250 VAC cos φ ≥ 0,2	0,00057	0,0011	2,75	250 V FA 0,100 A 6x32	R094315	MI6FA25V0,1
		0,125		0,00077	0,0015	2,60	250 V FA 0,125 A 6x32	F084323	MI6FA25V0,125
		0,160		0,002	0,004	2	250 V FA 0,160 A 6x32	G084301	MI6FA25V0,16
		0,200		0,0046	0,009	1,7	250 V FA 0,200 A 6x32	C084320	MI6FA25V0,2
		0,250		0,009	0,018	1,55	250 V FA 0,250 A 6x32	H084302	MI6FA25V0,25
		0,315		0,016	0,032	1,45	250 V FA 0,315 A 6x32	D084321	MI6FA25V0,315
		0,400		0,03	0,06	1,4	250 V FA 0,400 A 6x32	E084322	MI6FA25V0,4
		0,500		0,05	0,1	1,4	250 V FA 0,500 A 6x32	J084303	MI6FA25V0,5
		0,630		0,12	0,24	1,15	250 V FA 0,630 A 6x32	B084319	MI6FA25V0,63
		0,800		0,25	0,5	1	250 V FA 0,800 A 6x32	G084324	MI6FA25V0,8
		1,000		0,11	0,2	0,71	250 V FA 1,000 A 6x32	K084304	MI6FA25V1
		1,250		0,26	0,5	0,55	250 V FA 1,250 A 6x32	L084305	MI6FA25V1,25
		1,600		0,39	0,7	0,65	250 V FA 1,600 A 6x32	M084306	MI6FA25V1,6
		2,000		0,81	1,4	0,55	250 V FA 2,000 A 6x32	N084307	MI6FA25V2
		2,500		1,44	2,5	0,52	250 V FA 2,500 A 6x32	P084308	MI6FA25V2,5
		3,150		2,46	4,3	0,53	250 V FA 3,150 A 6x32	Q084309	MI6FA25V3,15
		4,000		4,6	8	0,48	250 V FA 4,000 A 6x32	R084310	MI6FA25V4
		5,000		11	20	0,37	250 V FA 5,000 A 6x32	S084311	MI6FA25V5
		6,300		23	40	0,31	250 V FA 6,300 A 6x32	T084312	MI6FA25V6,3
		8		1,5	25	0,19	250 V FA 8,000 A 6x32	V084313	MI6FA25V8
10	2,5	42	0,19	250 V FA 10,00 A 6x32	W084314	MI6FA25V10			
12,5	3,8	60	0,2	250 V FA 12,50 A 6x32	X084315	MI6FA25V12,5			
16	7,1	115	0,15	250 V FA 16,00 A 6x32	Z084317	MI6FA25V16			
20	12,7	200	0,14	250 V FA 20,00 A 6x32	A084318	MI6FA25V20			
125	25	100 kA 125 VAC cos φ ≥ 0,2	32,5	200	0,14	125 V FA 25,00 A 6x32	H084325	MI6FA12,5V25	
			61,5	400	0,12	125 V FA 30,00 A 6x32	J084326	MI6FA12,5V30	

Ratings lower than 0,1A : please enquire.


Very HRC Fuses

6x32


125V to 250V - FA Very Fast Acting

Time-current characteristics


250V FA 6x32

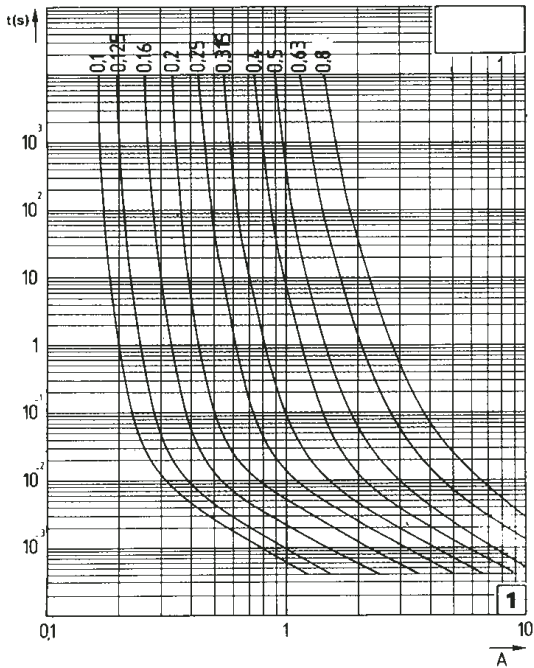


250V FA 6x32

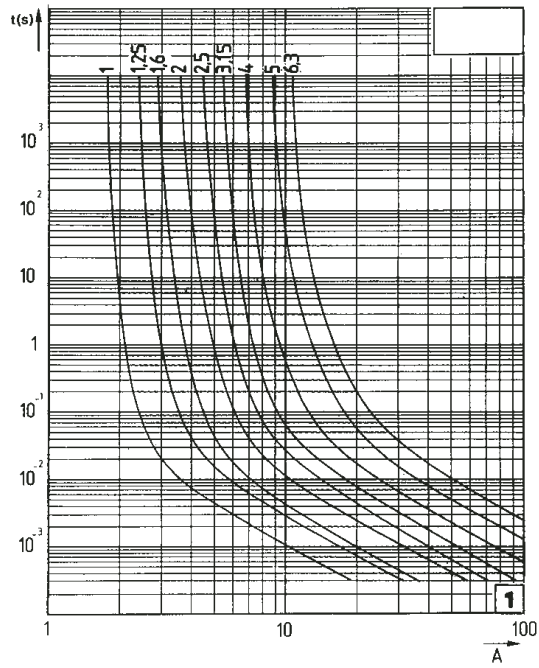

250V FA 6x32

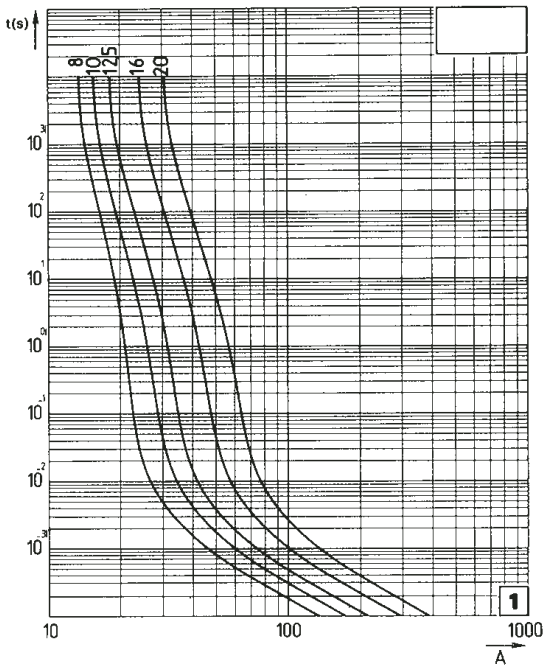

125V FA 6x32

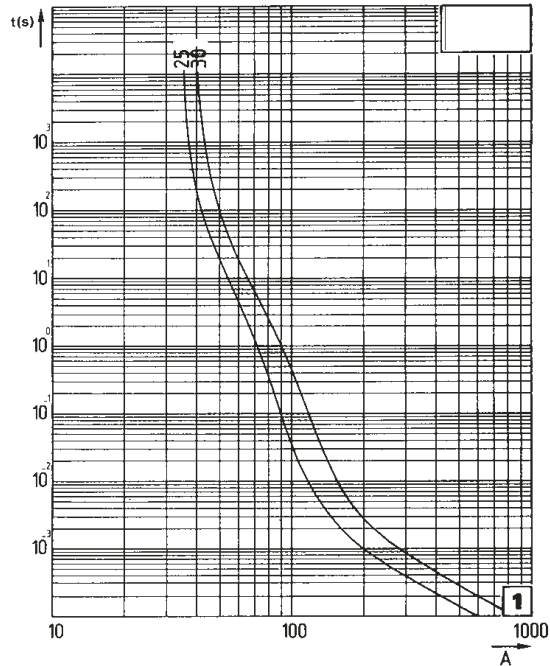

I margin $\pm 12\%$. Actual pre-arcing time(s). R.M.S. Value of pre-arcing current (A).

Packaging: Blister per 50 pièces.

For a 500 pieces box packaging consult us.