

Table 3

Cat. No.	Models	Cross-reference	Sizes	Rated voltage (V)	Rated current (A)	Fig.	Dimensions/size (mm)	Weight (g)
	MIRO	gG(Normal) aR(Fast)					ϕA ϕC ϕD L	
0301	RO21 RS21	5SB E27 5SD RL6-25 RL93	D II	500	2~6 8~10 13 16 20 25	3.1 3.1 3.1 3.1 3.1 3.1	6 22 13 50 8 22 13 50 8 22 15 50 10 22 15 50 12 22 15 50 14 22 15 50	24.8
0302	RO22 RS22	5SB E33 5SD RL6-63 RL93	D III	500	30~40 50 63	3.1 3.1 3.1	16 27 20 50 18 27 20 50 20 27 20 50	48.1
0303	RO23 RS23	-	D III	750	2~6 8~10 16 20 25 35 50 63	3.1 3.1 3.1 3.1 3.1 3.1 3.1 3.1	6 27 20 70 8 27 20 70 10 27 20 70 12 27 20 70 14 27 20 70 16 27 20 70 18 27 20 70 20 27 20 70	64
0304	RO24 RS24	E16 5SA	-	500	2~6 10 16 20~25	3.1 3.1 3.1 3.1	6 12.5 11.3 50 8 12.5 11.3 50 10 12.5 11.3 50 12 12.5 11.3 50	11.7
0305	RO27 RS27	BLA BLC	-	600	3~10	3.1	8 12.5 11.5 50	13.1
0306	RO28 RS28	BLA BLC	-	600	15~20	3.1	10 12.5 11.5 50	14.5
0307	RO29 RS29	BLA BLC	-	600	25~40	3.1	14 12.5 11.5 50	16.4

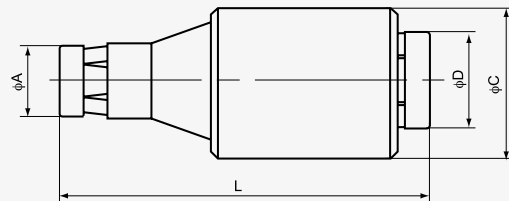


Figure 3.1

Table 3 (cont.)

Cat. No.	Models	Cross-reference	Sizes	Rated voltage (V)	Rated current (A)	Fig.	Dimensions/size (mm)	Weight (g)
	MIRO	gG(Normal) aR(Fast)					ϕA ϕB ϕC ϕD L	
0308	RO26 RS26	E14 RL8 5SE E18	D01	380	2~6 10 16	3.2 3.2 3.2	5 7.3 10.6 10 36 5 8.5 10.6 10 36 5 9.7 10.6 10 36	12.7
			D02		20 25 35 50 63	3.2 3.2 3.2 3.2 3.2	8.5 11 15 14 36 8.5 12 15 14 36 8.5 13.3 15 14 36 8.5 14.5 15 14 36 8.5 16 15 14 36	13.8
			D03		80 100	3.2 3.2	17 22 21 43 17 25 22 21 43	15.6

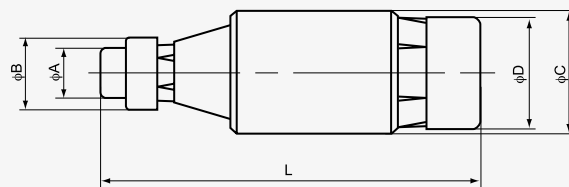


Figure 3.2



Table 3 (cont.)

Cat. No.	Models	Cross-reference	Sizes	Rated voltage (V)	Rated current (A)	Fig.	Dimensions/size (mm)	Weight (g)
	MIRO	gG(Normal) aR(Fast)					ϕA ϕB ϕC L	
0309	RL1-15	RLS1-15	-	380	2~15	3.3	13 16.5 13 32	13
0310	RL1-60	RLS1-60	-	380	20~60	3.3	19 26.5 19 49	50.7

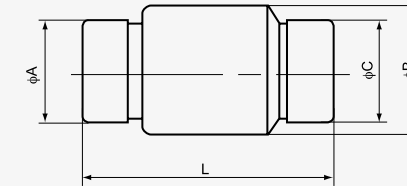


Figure 3.3

Table 3 (cont.)

Cat. No.	Models	Cross-reference	Sizes	Rated voltage (V)	Rated current (A)	Fig.	Dimensions/size (mm)	Weight (g)
	MIRO	gG(Normal) aR(Fast)					ϕA ϕB ϕC ϕD	
0311	RL1-100	RLS1-100	-	380	50~100	3.4	6.5 27.5 32.5 27.5	92.8
0312	RO201 RS201	5SB BLA RL6-100	D IV D V	600	80 100	3.4	5 - 33.5 28.5 112.2 7 - 33.5 28.5 115	
0313	RO202 RS202	5SB BLA	-	600	150~350	3.4	8 - 45 38 200.5	
0314	RO203 RS203	5SB BLA	-	600	400~630	3.4	10 - 60 50 320	

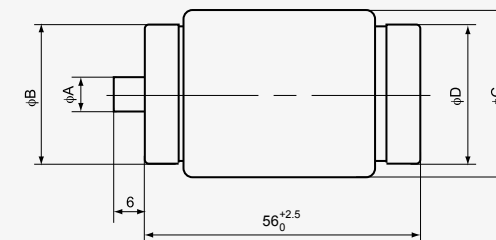


Figure 3.4

Table 3 (cont.)

Cat. No.	Models	Cross-reference	Sizes	Rated voltage (V)	Rated current (A)	Fig.	Dimensions/size (mm)	Weight (g)
	MIRO	gG(Normal) aR(Fast)					ϕA ϕB ϕC ϕD L	
0315	RL1-200	RLS1-200	-	380	160~200	See Figure 3.5		204

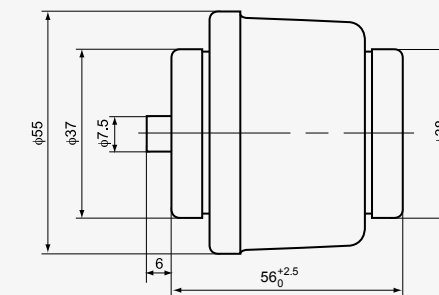


Figure 3.5

