



Cart 中文

Home About Us News Products Certificate Services Contact

MINGRONG

Professional manufacturer for High & Low Voltage Fuses and Fusegears Combined Electrical Appliance

Product Center

>> Home / Product Center / Square Pipe Fuse Links With Knife Contacts



Parameter Feature Outline Curve

Table 4 (cont.)

Cat. No.	Models		Cross-reference		Rated voltage (V)	Rated current (A)	Dimensions/size (mm)					Weight (g)		
	MIRO	gG(Normal)	RS	aR(Fast)			Sizes Fig.	A	B	C	D		H	
0418	RO32	RS32	NT1 RT16-1 3NA1 RT20-1	3NE 12.. NGTC1	500/690	32~250	1	4.8	135	68	20	48	60	455
0419	RO32A	RS32A	-	-	1140	200	1	4.8	172	110	19.5	44		
0420	RO32B	RS32B	NT1 RT16-1	-	500	250	2	4.8	135	68	20	40		
0421	RO33	RS33	NT2 RT16-2 3NA1 RT20-2	3NE 13.. NGTC2	500/690	80~400	2	4.8	150	68	25	52		
0422	RO33B	RS33B	RT16-2	-	500	400	2	4.8	150	68	25	52		
0423	RO34	RS34	NT3 RT16-3 NH3 RT20-3	3NE 14.. NGTC3	500/690	160~630	3	4.8	150	68	32	68		
0424	RO35	RS35	-	-	500	6~160		4.8	135	68	20	30		
0425	RO36	RS36	EAPO	-	500	32~200	1	4.8	135	68	20	40	59	356
0426	RO39A	RS39A	NT4a	-	380/500	500~1250	4a	4.8	200	90	50	97	113	2140



INQUIRY
400-800-9662

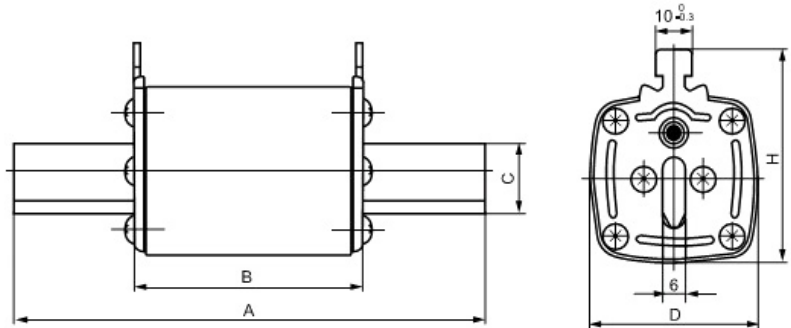


Figure 4.8

About Mingrong

- Company Profile
- Development
- Organization
- President address

News and media

- Company news
- Enterprise video
- Exhibition information

Products and Services

- Fuse links
- Bole connected fuse links
- Fuse bases
- Fuse alarms
- Fuse carriers
- Combinating electric of fuse
- Automobile Fuse

Support

- Customer Service Center
- Customer complaints
- Marketing network
- Technical FAQ
- Download

Jobs

- Talent concept
- Recruitment information
- Recruitment line

Contact Us

- Regions
- Contact
- Sitemap

High voltage fuse

Copyright © Zhejiang Mingrong Electrical Protection Co., Ltd All Rights Reserved

