

Miniature Fuse, 5 x 20 mm, Super-Quick-Acting FF, 250 VAC



250 VAC · Super-Quick-Acting FF

See below:
[Approvals and Compliances](#)


Description

- High breaking capacity
- Ceramic Tube

Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

| | |
|------------------------------|--|
| Rated Voltage | 250 VAC |
| Rated current | 1.6 - 10A |
| Breaking Capacity | 1500A |
| Characteristic | Super-Quick-Acting FF |
| Mounting | Fuseholder / Clip |
| Admissible Ambient Air Temp. | -40 °C to 85 °C |
| Climatic Category | 40/085/21 acc. to IEC 60068-1 |
| Material: Tube | Ceramics |
| Material: Endcaps | Nickel-Plated Copper Alloy |
| Unit Weight | 1.19 g |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |
| Product Marking |  Rated current, Rated Voltage, Characteristic |


Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.





Application standards

Application standards where the product can be used


| Organization | Design | Standard | Description |
|---|--------------------------------|----------------|--|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment. |

Compliances

The product complies with following Guide Lines

| Identification | Details | Initiator | Description |
|---|--|-------------|---|
|  | CE declaration of conformity | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | RoHS | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863 |
|  | China RoHS | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS. |
|  | REACH | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force. |

Dimension [mm]

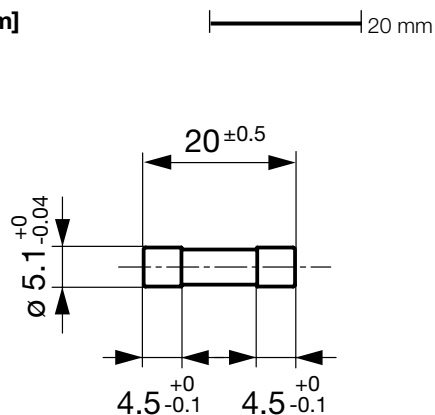


Pre-Arcing Time

Rated Current I_n 1.2 x I_n min. 2.0 x I_n min. 2.0 x I_n max. 2.75 x I_n min. 2.75 x I_n max. 4.0 x I_n min. 4.0 x I_n max. 10.0 x I_n max.

| | | | | | | | | |
|--------------|--------|-------|-----|------|-------|------|-------|------|
| 1.6 A - 10 A | 60 min | 10 ms | 2 s | 4 ms | 50 ms | 2 ms | 15 ms | 2 ms |
|--------------|--------|-------|-----|------|-------|------|-------|------|

Time-Current-Curves

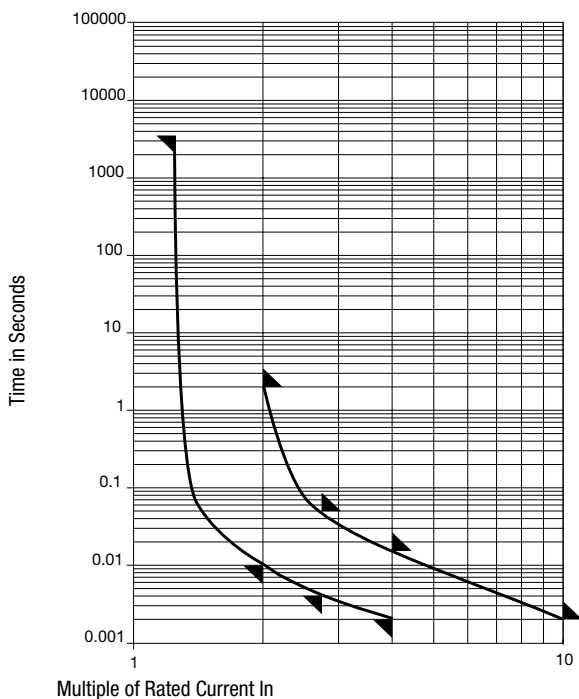

All Variants

| Rated Current [A] | Rated Voltage [VAC] | Breaking Capacity | Voltage Drop 1.0 I_n max. [mV] | Voltage Drop 1.0 I_n typ. [mV] | Power Dissipation 1.25 I_n typ. [mW] | Melting I^2t 10.0 I_n typ. [A ² s] | Order Number |
|-------------------|---------------------|-------------------|----------------------------------|----------------------------------|--|---|--------------|
| 1.6 | 250 | 1) | 400 | 250 | 600 | 0.384 | 0034.0903 |
| 2 | 250 | 1) | 370 | 200 | 600 | 0.484 | 0034.0904 |
| 2.5 | 250 | 1) | 340 | 200 | 800 | 1.06 | 0034.0905 |
| 3.15 | 250 | 1) | 310 | 180 | 1000 | 1.26 | 0034.0906 |
| 4 | 250 | 1) | 280 | 180 | 1200 | 1.28 | 0034.0907 |
| 5 | 250 | 1) | 250 | 160 | 1400 | 1.78 | 0034.0908 |
| 6.3 | 250 | 1) | 250 | 170 | 2000 | 5.95 | 0034.0909 |

| Rated Current [A] | Rated Voltage [VAC] | Breaking Capacity | Voltage Drop 1.0 I _n max. [mV] | Voltage Drop 1.0 I _n typ. [mV] | Power Dissipation 1.25 I _n typ. [mW] | Melting I ² t 10.0 I _n typ. [A ² s] | Order Number |
|-------------------|---------------------|-------------------|---|---|---|--|--------------|
| 8 | 250 | 1) | 250 | 190 | 2800 | 8.32 | 0034.0910 |
| 10 | 250 | 1) | 250 | 160 | 2900 | 17 | 0034.0911 |

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 1500 A @ 250 VAC , p.f. = 0.7 - 0.8

Packaging Unit

xxxx.xxxx
xxxx.xxxx.G

Small Box Pack (10 pcs.)
Bulk 128 x 91 x 60 mm (1000 pcs.)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schurter:

[0034.0910](#) [0034.0906](#) [0034.0911](#) [0034.0904](#) [0034.0903](#) [0034.0908](#) [0034.0909](#) [0034.0907](#) [0034.0905](#)