


MVE STANDARD RANGE



4 POLES - 1500/1800 rpm

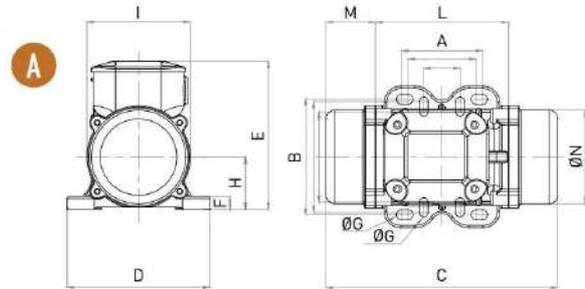

* Image referred to size 90

Wm (kgcm)		Model		Centrifugal Force (kg)		Weight (kg)		ELECTRICAL SPECIFICATIONS							CERTIFICATE	
								Input Power (kW)		Nominal Current A max. (Y)		Ia / In		Cable Gland	Class II Div.2	II3D
50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	Metric	Temp. Class	Temp. Class		
2	2	MVE 40/15	MVE 40/18	25	36	5		0.04	0.05	0.3	0.3	2.0	2.0	M16	T4	100 °C
6	4	MVE 90/15	MVE 90/18	75	76	7		0.1	0.1	0.3	0.3	3.5	3.8	M20	T4	100 °C
15	11	MVE 200/15	MVE 200/18	194	196	12		0.2	0.2	0.5	0.5	2.0	2.0	M20	T4	100 °C
33	23	MVE 400/15	MVE 400/18	420	423	19		0.3	0.3	0.8	0.9	2.5	2.5	M20	T4	100 °C
40	28	MVE 500/15	MVE 500/18	504	508	21		0.3	0.4	1.1	1.1	2.8	2.7	M20	T4	100 °C
27	19	MVE 300/15	MVE 300/18	334	336	22		0.6	0.7	1.3	1.4	3.0	3.2	M20	T4	100 °C
57	39	MVE 700/15	MVE 700/18	714	712	27		0.6	0.7	1.3	1.4	3.0	3.2	M20	T4	100 °C
89	62	MVE 1100/15	MVE 1100/18	1.114	1.122	36	28	0.6	0.8	1.5	1.7	3.8	3.8	M20	T4	100 °C
109	77	MVE 1400/15	MVE 1400/18	1.364	1.388	60	58	0.9	1.1	1.7	1.8	4.0	4.0	M25	T4	135 °C
137	92	MVE 1700/15	MVE 1700/18	1.725	1.664	62	59	1.1	1.3	2.2	2.1	4.7	4.5	M25	T4	135 °C
188	137	MVE 2400/15	MVE 2400/18	2.358	2.485	68	62	1.6	1.9	3.0	3.2	4.9	4.9	M25	T4	135 °C