




MVE STANDARD RANGE



2 POLES – 3000/3600 rpm

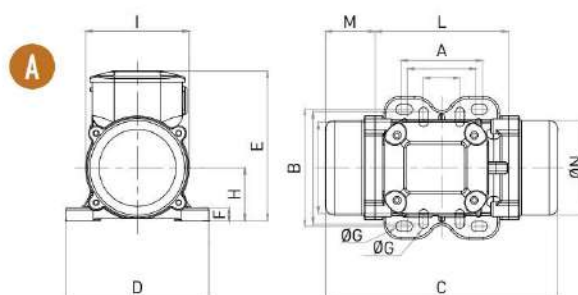

* Image referred to size 50

Wm (kgcm)		Model		Centrifugal Force (kg)		Weight (kg)		Input Power (kW)		Nominal Current A max. (Y)		Ia / In		Cable Gland	 Class II Div.2	 II3D
50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz	60Hz	50Hz (400V)	60Hz (460V)	50Hz	60Hz	Metric	Temp. Class	Temp. Class
1	1	MVE 60/3	MVE 60/36	66	71	4		0.1	0.1	0.2	0.2	3.0	3.0	M16	T4	100 °C
2	1	MVE 100/3	MVE 100/36	98	95	5		0.1	0.1	0.2	0.2	3.0	3.0	M16	T4	100 °C
4	3	MVE 200/3	MVE 200/36	187	189	7		0.2	0.2	0.3	0.3	3.3	3.3	M20	T4	100 °C
4	3	MVE 202/3	MVE 202/36	187	189	7		0.2	0.2	0.3	0.3	3.3	3.3	M20	T4	100 °C
6	4	MVE 300/3	MVE 300/36	321	323	10		0.3	0.3	0.5	0.4	3.6	3.5	M20	T4	100 °C
8	6	MVE 400/3	MVE 400/36	407	411	10		0.3	0.4	0.6	0.6	3.5	3.5	M20	T4	100 °C
10	7	MVE 500/3	MVE 500/36	530	534	16		0.5	0.6	1.0	1.0	4.0	4.2	M20	T4	100 °C
15	11	MVE 700/3	MVE 700/36	758	765	16		0.7	0.7	1.2	1.2	4.3	5.0	M20	T4	100 °C