



Cart 中文

[Home](#) [About Us](#) [News](#) [Products](#) [Certificate](#) [Services](#) [Contact](#)



MIN ING

Professional Engineer for High & Low Voltage Fuses and Fusegears Combined Electrical Appliance

Proc Center

[>> Home / Product Center / Screw Fuse Bases](#)



Parameter

Feature

Outline

Curve

Table 10

Cat. No.	Models	Fuse link		Rated insulation voltage(V)	Conventional free air thermal current(A)	Dimensions (mm)										Weight (g)
		Size	Models			Fig.	A1	A2	B1	B2	B3	H	φD	φd		
1001	RO(FB)21	D II	RL6-25	500	25	10.1	27	45	30	45	68	72	38.5			
1002	RO(FB)22	D III	RL6-63	500	63	10.1	38	53	33	54	85	80	48			
1003	FB24	-	RO(S)24	660	25	10.1	25	35	22	33	56	68	30			



浙江嘉信电器 中国制造商旗舰店

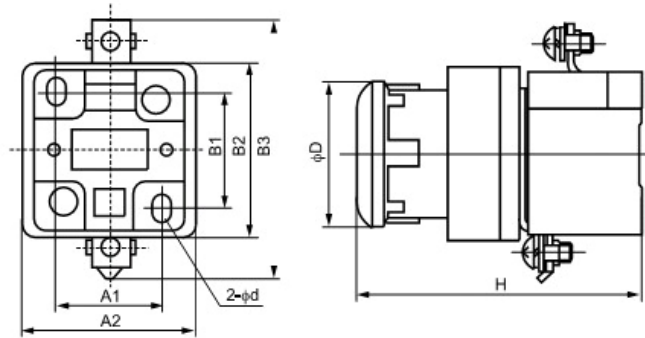


Figure 10.1



INQUIRY
400-800-9662

Table 10																
Cat. No.	Models	Fuse link		Rated insulation voltage(V)	Conventional free air thermal current(A)	Dimensions (mm)										Weight(g)
		Size	Models			Fig.	A1	A2	B1	B2	B3	H	φD	φd		
1001	RO(FB)21	D II	RL6-25	500	25	10.1	27	45	30	45	68	72	38.5	5×6	159	
1002	RO(FB)22	D III	RL6-63	500	63	10.1	38	53	33	54	85	80	48	5×6	265	
1003	FB24	-	RO(S)24	660	25	10.1	25	35	22	33	56	68	30	4×6	118	

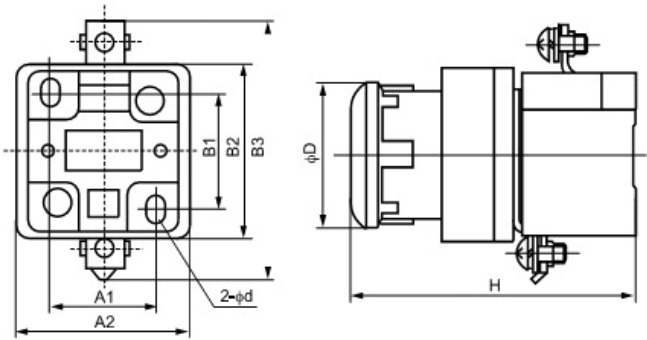


Figure 10.1

About Mingrong	News and media	Products and Services	Support	Jobs	Contact Us
Company Profile	Company news	Fuse links	Customer Service Center	Talent concept	Regions
Development	Enterprise video	Bole connected fuse links	Customer complaints	Recruitment information	Contact
Organization	Exhibition information	Fuse bases	Marketing network	Recruitment line	Sitemap
President address		Fuse alarms	Technical FAQ		
		Fuse carriers	Download		
		Combinating electric of fuse			
		Automobile Fuse			
		High voltage fuse			