



Cart 中文

Home About Us News Products Certificate Services Contact

MINGRONG

Professional Manufacturer for High & Low Voltage Fuses and Fusegears Combined Electrical Appliance

Product Center

>> Home / Product Center / Square fast-acting



Parameter Feature Outline Curve

Table 7 (cont.)

Cat. No.	Models MIRO	Cross-reference	Rated voltage (V)	Rated current (A)	Fig.	Dimensions/sizes (mm)							Weight (g)
						A	B	C	D	E	F	φd	
0716	RS71B	LK-NES	800	50~200	7.4	76	104	135	43	22	6	10.5	370
0717	NGT1	RS6-1	380/690/1000	100~250	7.4	68	110	140	48	25	6	10.5	458
0718	NGT2	RS6-2	380/690/1000	200~400	7.4	68	110	140	58	32	6	10.5	654
0719	NGT3	RS6-3	380/690/1000	355~630	7.4	68	110	140	68	38	6	10.5	920

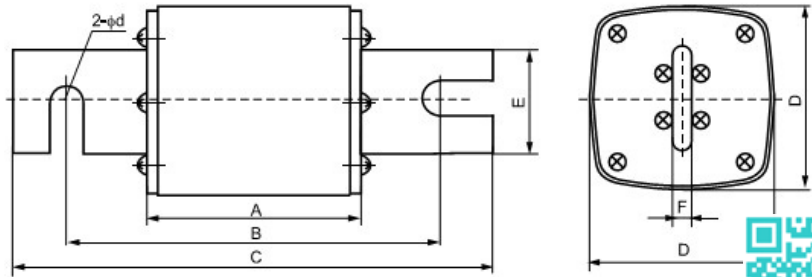


Figure 7.4



INQUIRY
400-800-9662

About Mingrong

- Company Profile
- Development
- Organization
- President address

News and media

- Company news
- Enterprise video
- Exhibition information

Products and Services

- Fuse links
- Bole connected fuse links
- Fuse bases
- Fuse alarms
- Fuse carriers
- Combinating electric of fuse
- Automobile Fuse
- High voltage fuse

Support

- Customer Service Center
- Customer complaints
- Marketing network
- Technical FAQ
- Download

Jobs

- Talent concept
- Recruitment information
- Recruitment line

Contact Us

- Regions
- Contact
- Sitemap

