

Table 4 (cont.)

Cat. No.	Models				Rated voltage (V)	Rated current (A)	Dimensions/size (mm)							Weight (g)
	MIRO		Cross-reference				Sizes Fig.	A	B	C	D	H		
	gG(Normal)	aR(Fast)	gG(Normal)	aR(Fast)										
0404	NH1	RS32	-	-	500/690	32~250	1	4.3	135	68	20	46	58	447
0405	NH2	RS33	-	-	500/690	80~400	2	4.3	150	68	30	58	68	727
0406	NH3	RS34	-	-	500/690	160~630	3	4.3	150	68	36	70	82	975

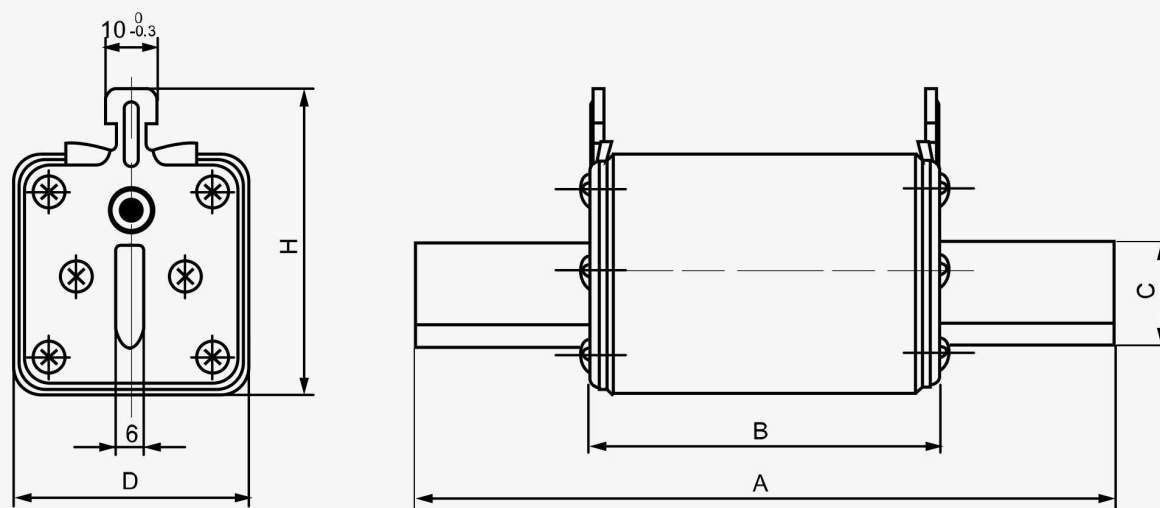


Figure 4.3

