

Figure 4.1

Table 4 (cont.)

Cat. No.	Models		Cross-reference		Rated voltage (V)	Rated current (A)	Dimensions/size (mm)						Weight (g)	
	MIRO		gG(Normal)	aR(Fast)			Sizes	Fig.	A	B	C	D		H
0402	NH00	RS31	-	3NE80...	500/690	10~160	00	4.2	78	50.5	15	30	60	201
			-	NGTC00										
0403	NH0	-	-	-	500/690	6~160	0	4.2	125	67	15	30	60	267

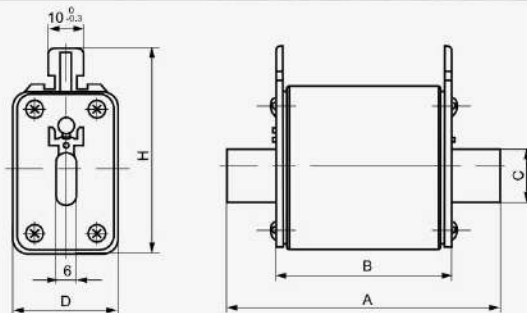


Figure 4.2

Table 4 (cont.)

Cat. No.	Models		Cross-reference		Rated voltage (V)	Rated current (A)	Dimensions/size (mm)						Weight (g)	
	MIRO		gG(Normal)	aR(Fast)			Sizes	Fig.	A	B	C	D		H
0404	NH1	RS32	-	-	500/690	32~250	1	4.3	135	68	20	46	58	447
0405	NH2	RS33	-	-	500/690	80~400	2	4.3	150	68	30	58	68	727
0406	NH3	RS34	-	-	500/690	160~630	3	4.3	150	68	36	70	82	975

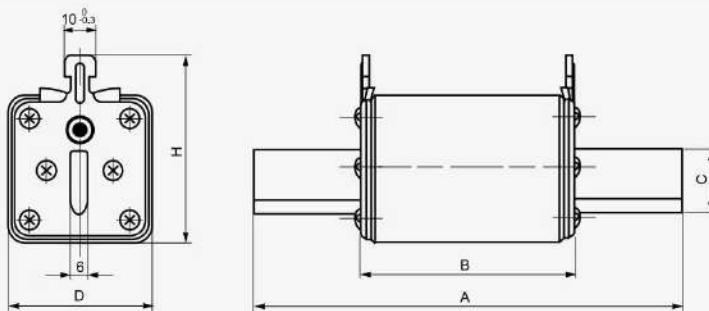


Figure 4.3

