

Product Center

>> Home / Product Center / Cylindrical Fuse Links





NQUIRY

00-800-9662

Parameter

Feature

Outline

Curve

Table 9 (cont.)											
Cat. No.	Models	Fuse link models	Rated insulation voltage(V)	Conventional free air thermal current(A)	Dimensions (mm)						Weight (g)
					Fig.	A1	A2	B	H1	H2	
0909	RT18-32(X)	10×38	690	32	9.5	79	81	18	61	80	59
0910	RT18B-10	8.5×23	690	10	9.5	80	82	18	60	78	59
0911	RT18B-16	10×25.8	690	16	9.5	80	82	18	60	78	59
0912	RT18B-20	8.5×31.5	690	20	9.5	80	82	18	60	78	59
0913	RT18B-25	10×31.5	690	25	9.5	80	82	18	60	78	59
0914	RT18B-32	10×38	690	32	9.5	80	82	18	60	78	59
0915	RT18C-10	8.5×23	690	10	9.5	77	78	18	62	81	56
0916	RT18C-16	10×25.8	690	16	9.5	77	78	18	62	81	56
0917	RT18C-20	8.5×31.5	690	20	9.5	77	78	18	62	81	56
0918	RT18C-25	10×31.5	690	25	9.5	77	78	18	62	81	56
0919	RT18C-32	10×38	690	32	9.5	77	78	18	62	81	56
0920	RT18M-32	10×38	690	32	9.5	78	81	18	60	80	56
0921	HG30-32	10×38	690	32	9.5	78	80	18	73	88	57
0922	RT18-63(X)	14×51	690	63	9.5	96	99	27	62.5	91	108

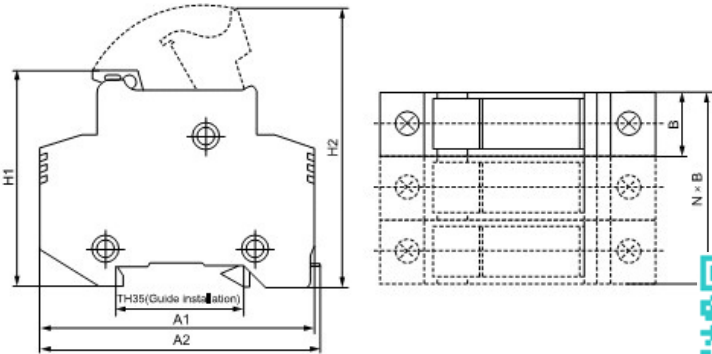


Figure 9.5



浙江明熔电器 中国制造/中国制造

